




Item	Specification
Clear-span width	6m
Eave height	2.6m
Ridge height	3.71m
Roof pitch	20°
Bay distance	3m
Longest component	3.5m
Minimum tent length	6m
Roof fixing	Bar tensioning
Main profile	100x48x3.0mm (4-channel)
Wind loading	80km/hour 0.3kn/m ²
Eave connection	Hot-dip Galvanized steel insert
Framework material	Hard pressed extruded aluminium 6061/T6 (15HW)
Cover material	PVC-coated polyester textile, flame retardant to DIN 4102 B1,M2,CFM. 750g-900g/m ²



- ### Optional accessories
- PVC window sidewalls
 - Anchoring
 - Rain Gutter
 - Lining and curtain
 - Glass door units
 - Transparent PVC cover and sidewall
 - Flooring system
 - Weight plate

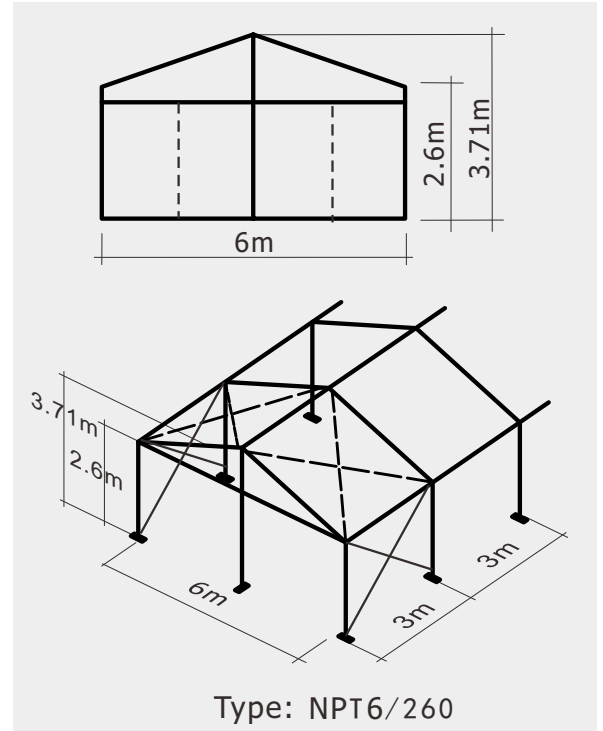