




Item	Specification
Clear-span width	15m
Eave height	4m
Ridge height	7.64m
Roof pitch	35°
Bay distance	4m
Longest component	6.32m
Minimum tent length	20m
Roof fixing	Bar tensioning
Door size	4×4m
Wind loading	120km/hour 0.5kn/m ²
Eave connection	Bolts Connecting
Framework material	Steel Q235
Cover material	PVC-coated polyester textile, flame retardant to DIN 4102 B1,M2,CFM. 750g-900g/m ²

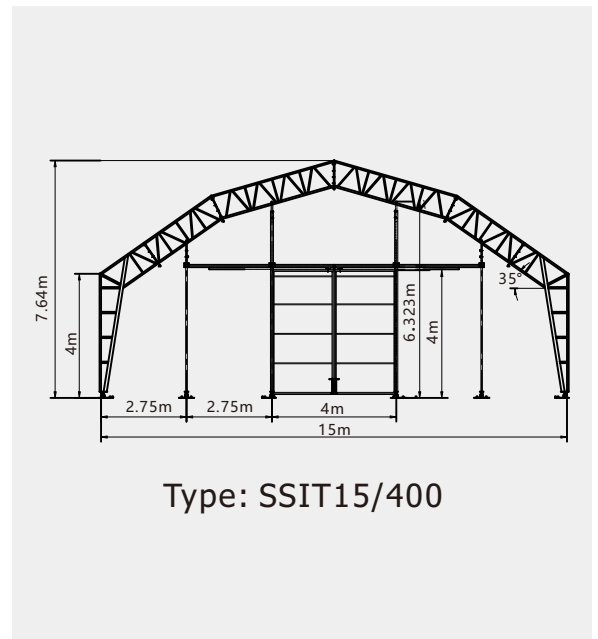

- Inflatable Thermal Insulation Roof
- PVC Cover
- Manual / Auto Rolling Door
- Sliding WindowSteel Sheel Wall
- Sandwich Panel Wall
- Man Door
- Air-conditioner