




Item	Specification
Clear-span width	30m
Eave height	5m
Ridge height	10.83m
Roof pitch	30°
Bay distance	4m
Longest component	9.49m
Minimum tent length	20m
Roof fixing	Bar tensioning
Door size	4x4m
Wind loading	120km/hour 0.5kn/m <sup>2</sup>
Eave connection	Bolts Connecting
Framework material	Steel Q235
Cover material	PVC-coated polyester textile, flame retardant to DIN 4102 B1,M2,CFM. 750g-900g/m <sup>2</sup>

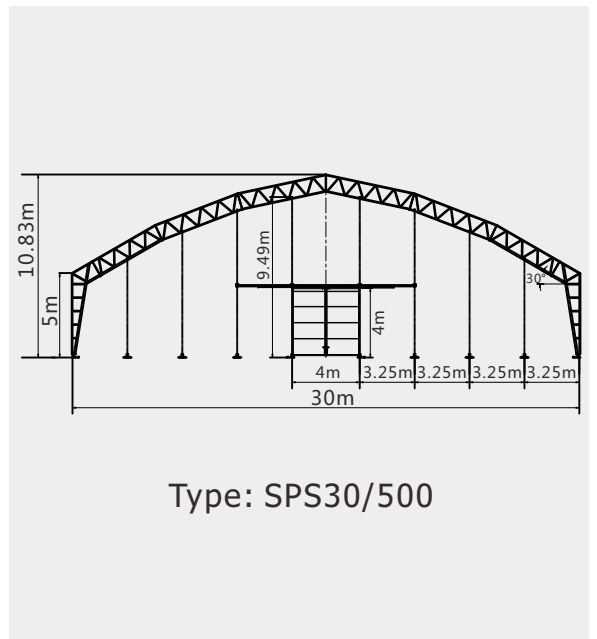

- Inflatable Thermal Insulation Roof
- PVC Cover
- Manual / Auto Rolling Door
- Sliding Window
- Steel Sheel Wall
- Sandwich Panel Wall
- Man Door
- Air-conditioner