




Item	Specification
Clear-span width	20m
Eave height	4.1m
Ridge height	16.4m
Roof pitch	60°
Bay distance	5m
Longest component	10.7m
Roof fixing	Bar tensioning
Main profile	256x121x5mm(4-channel)
Wind loading	100km/hour 0.5kn/m ²
Eave connection	Hot-dip Galvanized twin steel plate
Framework material	Hard pressed extruded aluminium 6061/T6 (15HW)
Cover material	PVC-coated polyester textile, flame retardant to DIN 4102 B1,M2,CFM. 750g-900g/m ²



- ### Optional accessories
- PVC window sidewalls
 - Anchoring
 - Rain Gutter
 - Lining and curtain
 - Glass door units
 - Hard walling system
 - Glass walling system
 - Transparent PVC cover and sidewall
 - Flooring system
 - Weight plate

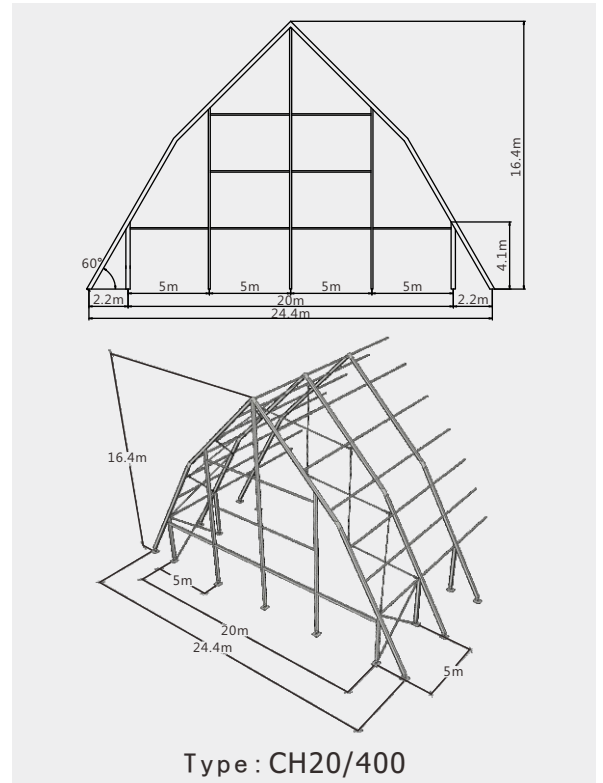