



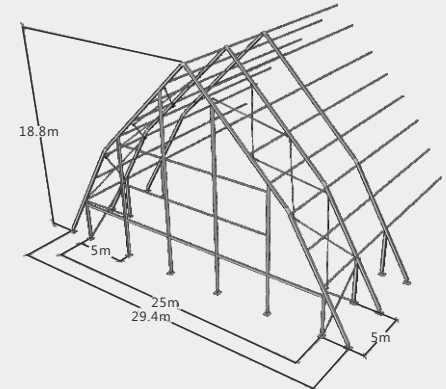

Item	Specification
Clear-span width	25m
Eave height	4.1m
Ridge height	18.8m
Roof pitch	60°
Bay distance	5m
Longest component	10.7m
Roof fixing	Bar tensioning
Main profile	256x121x5mm(4-channel)
Wind loading	100km/hour 0.5kn/m ²
Eave connection	Hot-dip Galvanized twin steel plate
Framework material	Hard pressed extruded aluminium 6061/T6 (15HW)
Cover material	PVC-coated polyester textile, flame retardant to DIN 4102 B1,M2,CFM. 750g-900g/m ²

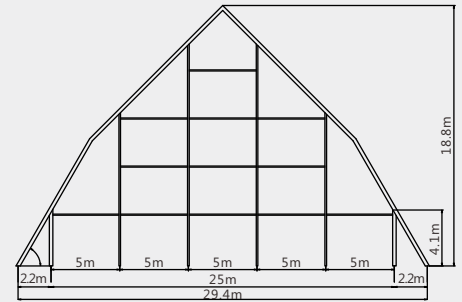


Type : CH25/400


Optional accessories

- PVC window sidewalls
- Anchoring
- Rain Gutter
- Lining and curtain
- Glass door units
- Hard walling system
- Glass walling system
- Transparent PVC cover and sidewall
- Flooring system
- Weight plate


Framework main profile dimension and use




upright support
Roof Beam




Gable pole



Ridge purlin
Eave purlin
Gable beam



Intermediale
purlin



Eave tension
rail