
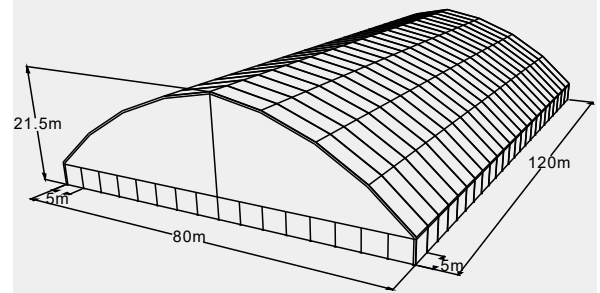
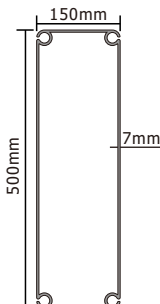






Type: PG80/600



Item	Specification
Clear span width	80m
Eave height	6m
Top height	21.5m
Bay distance	5m
Wind loading	100km/hour
Minimum tent length	50m
Longest component	10.6m
Roof pitch	34°
Main Profile	500x150x7/8mm
Roof Fixing	Bar Tensioning
Eave connection	Hot-dip Galvanized twin steel plate
Framework material	Hard pressed extruded aluminium 6061/T6 ( 15HW )
Cover material	PVC-coated polyester textile, flame retardant to DIN 4102 B1,M2,CFM. 750-900g/m <sup>2</sup>

Framework main profile dimension and use

 <p>Roof Beam Upright Support</p>	 <p>Gable Pole</p>	 <p>Gable Pole</p>
 <p>Gable Pole</p>	 <p>Eave Purlin Gable Pole Ridge Purlin</p>	 <p>Eave tension rail</p>

