



★ For Triple Decker Tent, frames and flooring systems of one level or two levels can be dismantled, which can be used for normal single decker tent or double decker tent.


① Installation of Single Decker

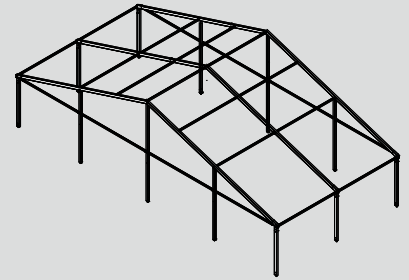

② Installation of Double Decker

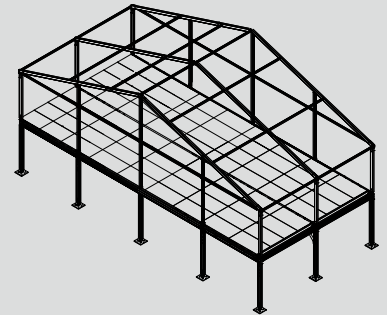

③ Installation of Triple Decker

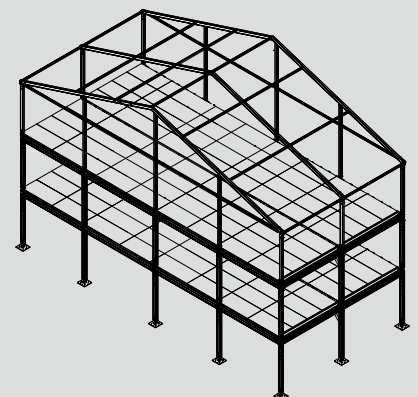

Item	Specification
Clear span width	20m
Height of first floor	3.35m
Height of second floor	3.35m
Height of third floor	3.3m
Eave height	10 m
Top height	13. 3m
Wind loading	100km/hour
Floor Loading Capacity	350kg/m ²
Roof pitch	18°
Main Profile	300x120x5mm(4-channel)
Roof Options	PVC Roof
Roof Fixing	Bar Tensioning
Eave connection	Hot-dip Galvanized twin steel plate
Framework material	Hard pressed extruded aluminium 6061/T6 (15HW)
Cover material	PVC-coated polyester textile,flame retardant to DIN 4102 B1,M2,CFM. 750-900g/m ²